
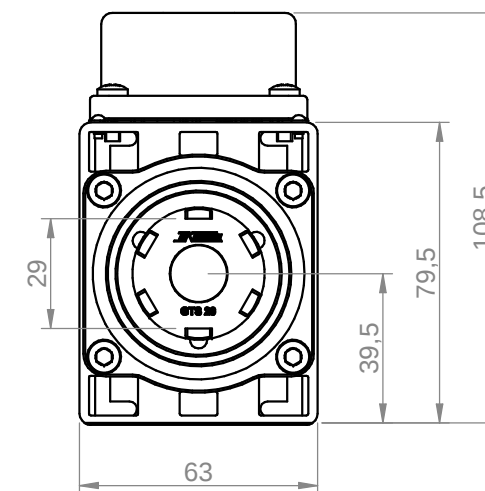
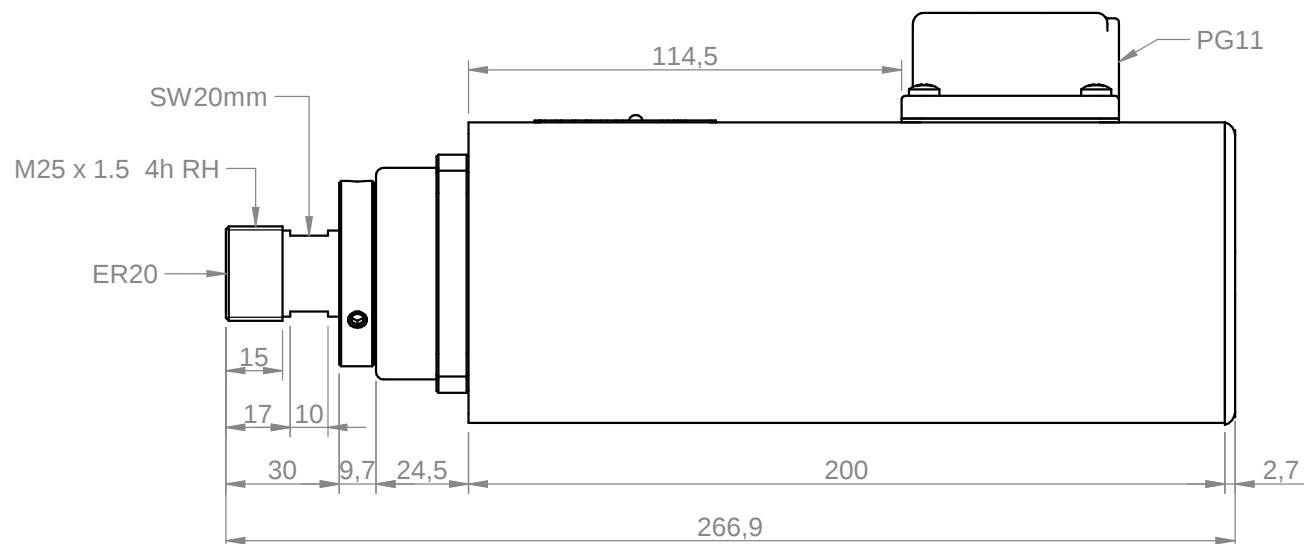
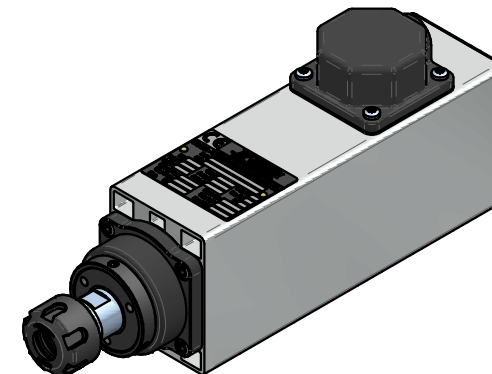


Ghiera serraggio
GTS20 RH

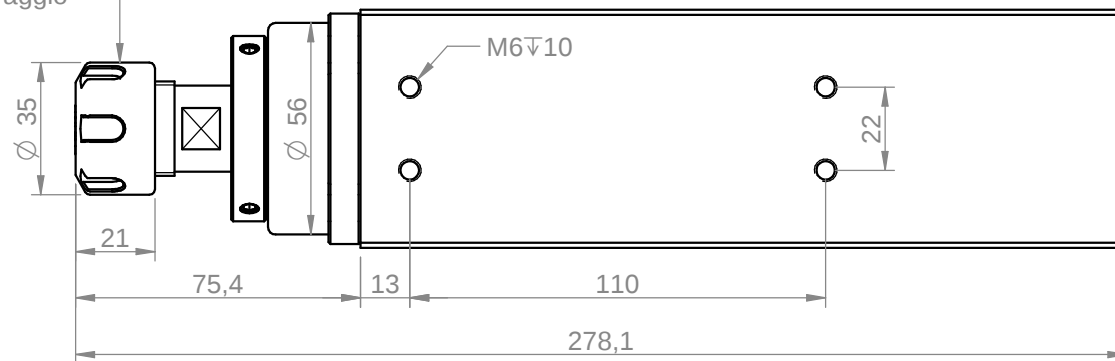

Power [kW] 0.73	Duty Cycle S1	Base speed [rpm] 18000	Base freq. [Hz] 300	Base voltage Δ [V] 220	Base voltage Y [V] 380	Protection IP54	Ins. Cl. F	 Teknomotor S.r.l. Via Argenega 31, I-32038 Quero Vas (BL) www.teknomotor.com		
Min speed [rpm] 6000		Max speed [rpm] 24000	Max freq. [Hz] 400	Absorb. Δ [A] 3.6	Absorb. Y [A] 2.1	Part number on nameplate COM31400219				
Balancing according to ISO 1940 - G2.5 @ 24000 rpm		Balancing type		tool type full key 	tool type half key 	Peso / weight 3.90 kg		Title 3140-C-DBS-P-ER20-RH		
Tolleranze non quotate / unlisted tolerances: ±0.5mm Smussi non quotati / unlisted chamfers: ±0.5mm				 = 0.8 √	 = 3.2 √	 = 12.5 √	 = ø √			
rev. n° 00	description Emissione					date 21/04/2010	signature D. Bottarel	Customer Catalogo		
								Drawing code COM31400219		
drawn - date D. Bottarel - 21/04/2010	approved - date S. Perli - 21/04/2010	checked - date S. Perli - 21/04/2010	sostituisce il			foglio / sheet 1 / 1		scala 1:2		A4
			sostituito dal							